


LINEDO SINGLE

PENDANT LUMINAIRES



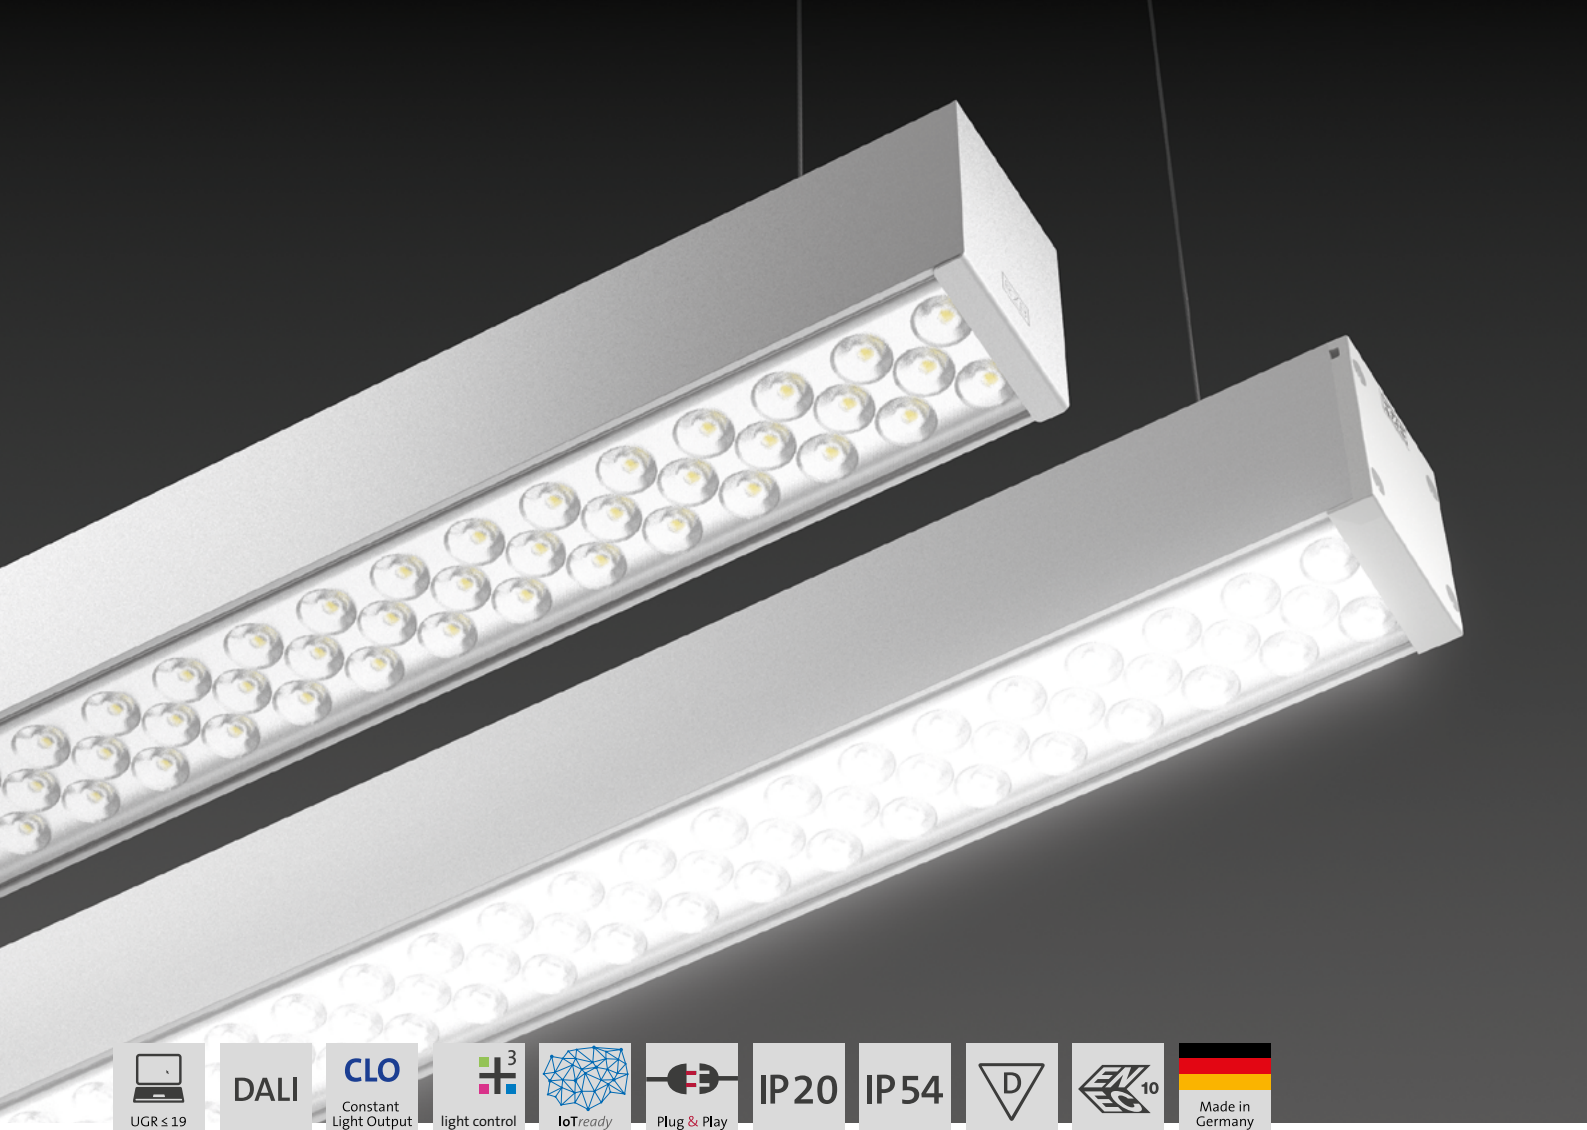


LINEDO SINGLE


Pendant luminaires

- Made in Germany. Made in Bamberg.
- Ideal for office areas ($UGR \leq 19$) and environments with computer screens in accordance with EN 12464-1
- Low flicker factor (100 Hz) < 1%
- Up to 10 years warranty
- LED rated life 80,000 h (L_{50}) DALI/CLO controlled - High planning reliability thanks to constant light output throughout the entire service life
- **ENEC** (European Norms Electrical Certification) certified
- **IoT ready** – control and monitoring via DALI-2 Standard (on request)
- Suitable for ambient temperatures from -25 up to +50°C (DALI/CLO up to 40°C)

312563.00X		
Floor 12 x 2,5 x 3m (0,2m)		
100 lx	150 lx	200 lx
1	2	2
Room 6 x 4 x 3 m (0,75 m)		
200 lx	300 lx	500 lx
2	3	4



312564.00X		
Floor 12 x 2,5 x 3m (0,2m)		
100 lx	150 lx	200 lx
1	2	2
Room 6 x 4 x 3 m (0,75 m)		
200 lx	300 lx	500 lx
2	2	3



Pendant luminaires | LINEDO Single IP20


Type of Protection: IP 20

Protection Class: I

Suspension Length: 100-1500 mm

Housing: extruded aluminium profile, powder-coated (white, black) or anodised. End cap aluminium powder-coated, without visible screws. High-efficiency LED units with optimum light control thanks to clear plastic (PC) lens optics. Ideal for office areas ($UGR \leq 19$) and environments with computer screens in accordance with EN 12464-1. 2-point steel cable suspension freely positionable and infinitely height-adjustable. With power cord (2.5 m). Please order canopy separately if required. Other luminaire lengths on request.

Available colours (X): 0 = aluminium, anodised, 2 = white, 3 = black



Reference number	Dimensions [mm]	Lamp	Light colour	Luminous flux [lm]	System power [W]	UGR	dim-able
Pendant luminaires							
Length L 1700 mm							
312563.00X	L 1700, B 58, H 76	LED	830	4550	31	16,7	on/off
312563.00X.76	L 1700, B 58, H 76	LED	830	4550	31	16,7	DALI
312563.00X.1	L 1700, B 58, H 76	LED	840	4850	31	16,9	on/off
312563.00X.1.76	L 1700, B 58, H 76	LED	840	4850	31	16,9	DALI
Length L 2264 mm							
312564.00X	L 2264, B 58, H 76	LED	830	6100	40	16,6	on/off
312564.00X.76	L 2264, B 58, H 76	LED	830	6100	40	16,6	DALI
312564.00X.1	L 2264, B 58, H 76	LED	840	6450	40	16,8	on/off
312564.00X.1.76	L 2264, B 58, H 76	LED	840	6450	40	16,8	DALI

Canopy

982575.01X L 185, B 42, H 30

Price Category 21



Pendant luminaires | LINEDO Single IP54

Type of Protection: IP 54


Protection Class: I

Suspension Length: 100-1500 mm

Housing: extruded aluminium profile, powder-coated (white, black) or anodised. End caps: plastic. High-efficiency LED units with optimum light control thanks to clear plastic (PC) lens optics. Ideal for office areas ($UGR \leq 19$) and environments with computer screens in accordance with EN 12464-1. 2-point steel cable suspension freely positionable and infinitely height-adjustable. With power cord (2.5 m). Please order canopy separately if required. Other luminaire lengths on request.

⚠ Luminaires with limited surface temperature in accordance with DIN EN 60598-2-24 for use in environments in which a deposit of conductive dust on the luminaire can be expected.

Available colours (X): 0 = aluminium, anodised, 2 = white, 3 = black



Reference number	Dimensions [mm]	Lamp	Light colour	Luminous flux [lm]	System power [W]	UGR	dim-able
Pendant luminaires							
Length L 1710 mm							
312565.00X	L 1710, B 58, H 76	LED	830	4550	31	16,7	on/off
312565.00X.76	L 1710, B 58, H 76	LED	830	4550	31	16,7	DALI
312565.00X.1	L 1710, B 58, H 76	LED	840	4850	31	16,9	on/off
312565.00X.1.76	L 1710, B 58, H 76	LED	840	4850	31	16,9	DALI
Length L 2274 mm							
312566.00X	L 2274, B 58, H 76	LED	830	6100	40	16,6	on/off
312566.00X.76	L 2274, B 58, H 76	LED	830	6100	40	16,6	DALI
312566.00X.1	L 2274, B 58, H 76	LED	840	6450	40	16,8	on/off
312566.00X.1.76	L 2274, B 58, H 76	LED	840	6450	40	16,8	DALI

Canopy

982575.01X L 185, B 42, H 30

Price Category 21



RZB
Rudolf Zimmermann,
Bamberg GmbH

Rheinstr. 16
96052 Bamberg
Germany

Phone +49 951 79 09-374

www.rzb-lighting.com
export@rzb.eu

Tip with added value:

The digital version of this publication contains **interactive links** that lead you from the article number directly to the web.



Member of **licht.de**

