
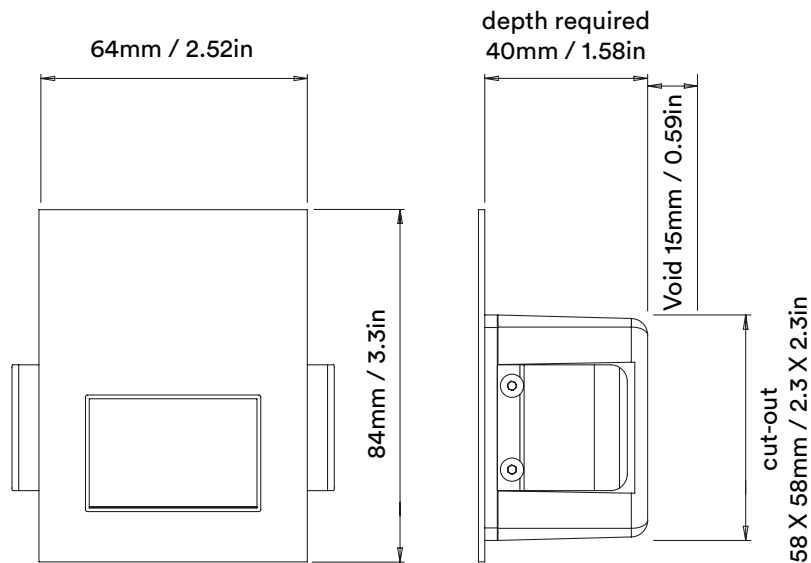


erluna

# vio tall origin natural



# vio tall origin natural

# orluna

|                     |                     |              |
|---------------------|---------------------|--------------|
|                     |                     | <b>2700K</b> |
|                     |                     | <b>SOFT</b>  |
| <b>LIGHT VALUES</b> |                     | Asymmetrical |
|                     | Initial Lumens      | 77           |
|                     | Engine Lumens       | N/A          |
|                     | Luminaire Lumens    | 32           |
|                     | Luminaire Lm/W      | 32           |
| <b>POWER</b>        | Voltage             | 9V           |
|                     | Drive Current       | 120mA        |
|                     | Circuit Power (typ) | 1W           |

|                     |                     |              |
|---------------------|---------------------|--------------|
|                     |                     | <b>3000K</b> |
|                     |                     | <b>SOFT</b>  |
| <b>LIGHT VALUES</b> |                     | Asymmetrical |
|                     | Initial Lumens      | 99           |
|                     | Engine Lumens       | N/A          |
|                     | Luminaire Lumens    | 41           |
|                     | Luminaire Lm/W      | 41           |
| <b>POWER</b>        | Voltage             | 9V           |
|                     | Drive Current       | 120mA        |
|                     | Circuit Power (typ) | 1W           |

|                   |                           |                                    |
|-------------------|---------------------------|------------------------------------|
| <b>DRIVER</b>     | Binning SDCM (Hot)        | 3                                  |
|                   | CRI (typ)(R9)             | 98 (99)                            |
|                   | TM30 Rf Rg                | Rf 97.7 Rg 100.4                   |
|                   | Lifetime (TM21)           | L90 B5 50,000hrs (inc driver)      |
|                   | Lifetime (Calculated)     | L70 426,000hrs                     |
|                   | Protocols                 | Mains Dim / DALI / 0-10V / Non-dim |
| Dim to Dark       | 0.1% Lux                  |                                    |
| Distance from LED | 20m / 65' (series wiring) |                                    |
| Emergency         | N/A                       |                                    |

## NUMBER OF LIGHTS PER DRIVER

| Protocols | Code    | No of lights per driver |
|-----------|---------|-------------------------|
| DALI      | D - 120 | 1 - 4                   |
| 0-10      | 0 - 120 | 1 - 4                   |
| Mains     | M - 120 | 2 only*1                |
| Mains     | M - 120 | 3 - 4*2                 |

\*1 <1% Dimming  
\*2 >3% Dimming

## SPECIFICATION CODE

| Engine type | Bezel     | Colour Temp                             | Driver        | Beam Width       | Bezel Colour  | Baffle Colour  | Options  |
|-------------|-----------|---|---------------|------------------|---|--|--|
| <b>NL</b>   | <b>VT</b> | <b>27</b>                               | <b>X</b>      | <b>A</b>         | <b>SS</b>   | <b>QB</b>  | <b>54</b>  |
|             |           | 27 / 2700K<br>30 / 3000K<br>*40 / 4000K | X / No Driver | A / Asymmetrical | SS / Stainless steel*1<br>W / White 9010*1<br>D / White 9003*1<br>A / Black anodised*1<br>G / Polished Brass*2<br>J / Antique Bronze*2<br>K / Brushed Chrome*2<br>L / Polished Chrome*2<br>F / Satin grey*3<br>P / Brushed Brass*3<br>Z / Other Metallic *3<br>C / Other RAL *3 | QB / Matt Aluminium<br>BB / Black Anodised<br>CB / Other RAL | 54 / IP54<br>67 / IP67*<br>P / Sea & Spa IP67<br>Z / LSZH Cable<br>K / Click Connector<br>I / Installation sleeve<br>Y / 10m Cable - 1m standard |
|             |           | *NOTE: increase 3000K by 7%             |               |                  | *1 - standard, in stock<br>*2 - premium, in stock<br>*3 - premium, non-stock  |  | *NOTE: IP67 only available in Stainless Steel, Anodised Black, Satin Grey and Brushed Brass  |